2021

Over 10years'
experience quality lighting
beyond imagination

Billionaire Lighting Co., LTD

ABOUT US

Billionaire Lighting Co., Ltd.was established in 2013 and belongs to Luview Industrial Technology Group. Its headquarter is located in Huayi Liwei Industrial Park, Longhua District, Shenzhen. It covers an area of more than 16,000 square meters and has 280 employees. Billionaire Lighting focuses on the field of commercial office lighting. Since its establishment, the company has always taken the idea of improving people's work and office lighting experience as its philosophy, providing global users with differentiated overall lighting solutions and diversified LED commercial office lighting products. Our LED floor lamps, panel lights and other products sell well in many countries and regions such as Germany, France, the United Kingdom, and the United States all year round.

Our business philosophy is to take customers as the center, to strive for excellence, and to pursue excellent products and services. We believe that only when our customers succeed can we have a chance to succeed. Starting from the interests of customers, providing better value services is the unchanging business tenet of Luview Group.

Billionaire Lighting

CONTENTS

Floor standing light

1 Timo

2 Nora

3 Zakoy

4 Natash

5 Siger

6 Kapla

7 Prima

8 Vatix

9 Tanko

Linear Pendant light

9 BR-CL1226-A09

10 BR-CL1226-A07

11 BR-CL1226-A10

Round Pendant light

12 Omic-C

13 Omic-T

14 Omic-X

Floor light

Timo

FS0015

Application

Features

1.Simple appearance design with a sense of line, dual use for office/home;
2.The lamp body adopts exquisite dusting technology, which makes it fashionable and shiny;
3.120Lm /W ultra-high light efficiency, no dark area;
4.Up and down lighting, UGR < 19, comfortable eye protection;
5.Selected Leford GMR strip-shaped non-stroboscopic power supply;
6.Control mode switch button with microwave induction;
7.Sturdy round base to ensure that the lamp is stable and not tilted;

Product Details

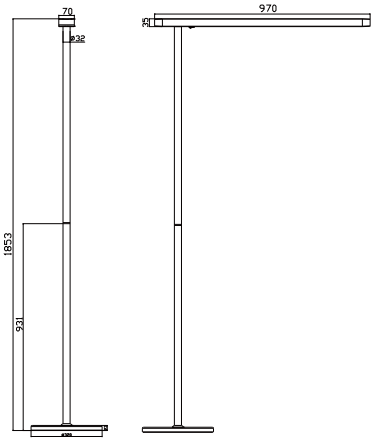

Timo-F



Timo-D

Technical data

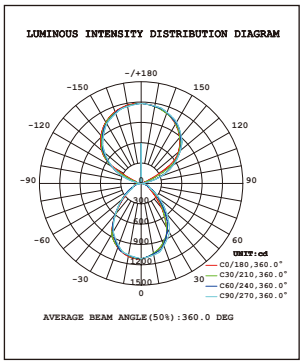

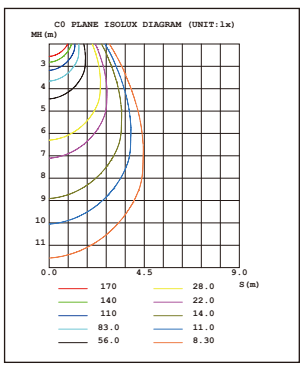

Product Series	Timo-F	Timo-D
Model Number	BR-FS0015-38W-A01	BR-FS0015-38W-A04
Size	970*70*1853mm	970*70*1138mm
Input Voltage	AC200-240V	AC200-240V
Lighting effcet	130LM/W	130LM/W
Input Power	38w	38w
Luminous ratio	Indirect↑60%； Direct↓40%;	Indirect↑60%； Direct↓40%;
Power Factor	＞0.9	＞0.9
Housing Color	RAL7038A(white/black available)	RAL7038A(white/black available)
Luminous Flux	5000LM	5000LM
CRI (Ra>)	80	80
UGR	＜19	＜19
Dimming type	/	/
Working Lifetime(Hour)	＞36000	＞36000
Lamp Body Material	Aluminum/Iron	Aluminum/Iron
Color Temperature	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
Protection Level	IP40	IP40
Working Temperature	-20°C~40°C	-20°C~40°C
Application	office/conference room/reception	office/conference room/reception
Light Source	SMD2835 / Everlight	SMD2835 / Everlight
Certification	CE/ROHS/FCC	CE/ROHS/FCC
Surface Finished	Powder painting	Powder painting
Feature	Fashion brief	Fashion brief
Beam angle	Indirect↑120°； Direct↓80°;	Indirect↑120°； Direct↓80°;
warranty	3years	3years
Packaging size	1050*120*357mm	1292*160*122mm
Outlet length	1.8m	1.8m

Floor light

Nora

FS0012

Application

Nora

Nora

Features

1.Unique appearance design, suitable for multi-scenario use;
2.120LM/W ultra-high luminous efficiency, no dark areas of light emission;
3.Upper and lower sides are illuminated, UGR＜19, comfortable and eye protection;
4.High-quality aluminum alloy lamp body with outstanding material;
5.Exquisite powder spraying technology, fashionable and shiny;
6.Curved touch panel control, independent dimming up and down;
7.Sturdy round base to ensure that the lamp is stable and not tilted;

Product Details

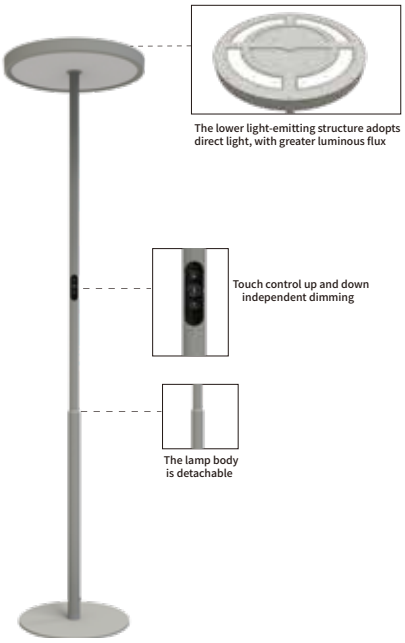

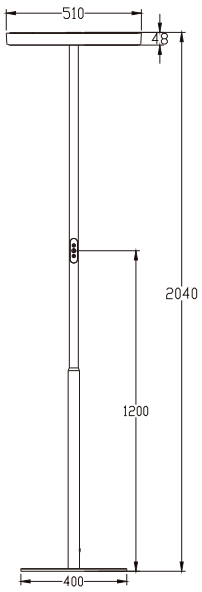

Nora

Technical data

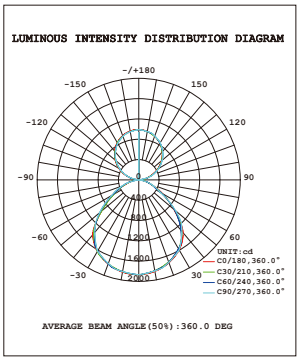

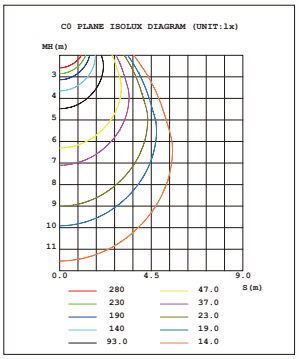

Product Series	Nora
Model Number	BR-FS0012-60W-G01
Size	D510*2040mm
Input Voltage	AC200-240V, 100-270V
Lighting effcet	125LM/W
Input Power	60w
Luminous ratio	Indirect↑40%； Direct↓60%;
Power Factor	＞0.9
Housing Color	RAL7038A(white/black available)
Luminous Flux	2800lm indirect/4550lm direct
CRI (Ra>)	80
UGR	＜19
Dimming type	PWM
Working Lifetime(Hour)	＞36000
Lamp Body Material	Aluminum
Color Temperature	3000K/4000K/5000K/6000K
Protection Level	IP40
Working Temperature	-20°C~40°C
Application	office/conference room/reception
Light Source	SMD2835-Everlight
Certification	CE/ROHS/FCC
Surface Finished	Powder painting
Feature	Fashion brief
Beam angle	Indirect↑120°； Direct↓95°;
warranty	3years
Packaging size	580*580*145mm/1250*145*90mm
Outlet length	2m

Floor light

Zakoy

FS0005

Application

Zakoy-F Zakoy-C

Zakoy-D

Features

1. Knob type resistance dimming, with economic, simple wiring maintenance, standby power can be achieved to 0 and other remarkable characteristics. The knob is located in the golden proportion of the lamp body, excellent humanized design.
2. Double-sided luminous design. The lower luminescence adopts PS optical diffusion plate, which effectively controls the anti-glare, and makes the glare index of the lamps controlled within 19. High light transmittance PMMA, 90% light transmittance, to maximize the luminance of lamps.
3. Strong and durable metal base, stable standing for high safety in usage.
4. Electrostatic powder spraying technology, the appearance of lamps is full of texture, fashionable and neat.

Product Details

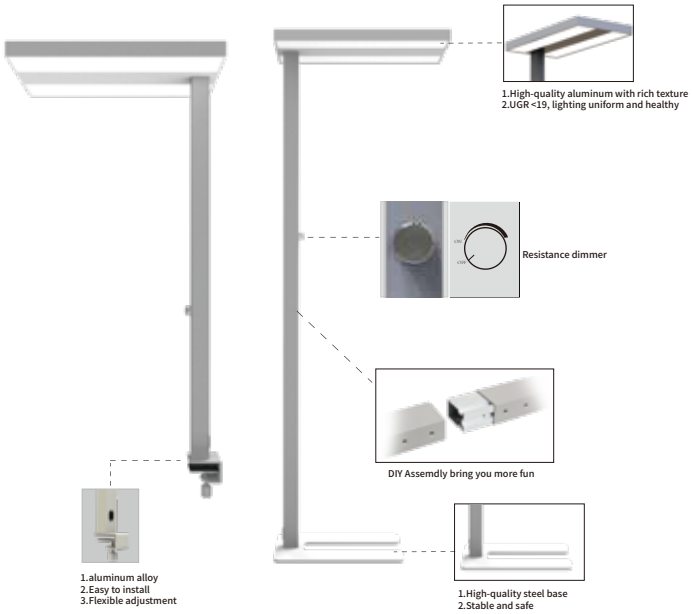

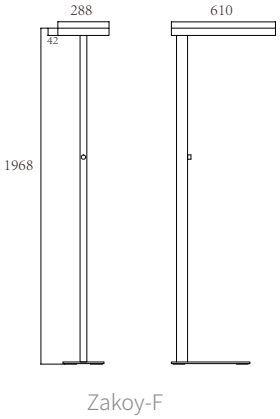

Zakoy-F

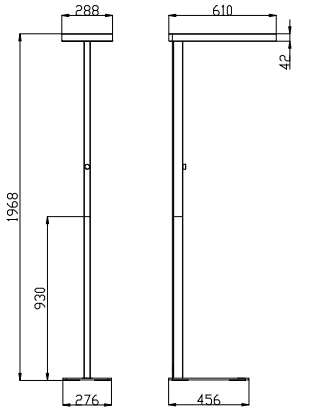

Zakoy-C

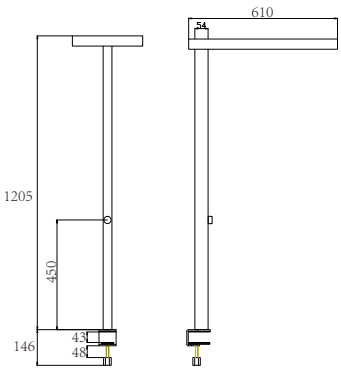

Zakoy-D

Technical data

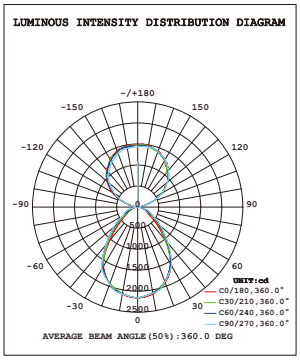

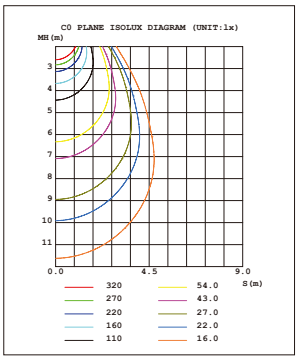

Product Series	Zakoy-F	Zakoy-C	Zakoy-D
Model Number	BR-FS0005-60W-A01	BR-FS0005-60W-A10	BR-FS0005-60W-A04
Size	610*288*1968mm	610*288*1968mm	610*288*1351mm
Input Voltage	AC200-240V	AC200-240V	AC200-240V
Lighting effcet	130LM/W	130LM/W	130LM/W
Input Power	60w	60w	60w
Luminous ratio	Indirect↑50%; Direct↓50%;	Indirect↑50%; Direct↓50%;	Indirect↑50%; Direct↓50%;
Power Factor	>0.9	>0.9	>0.9
Housing Color	RAL7038A(white/black available)	RAL7038A(white/black available)	RAL7038A(white/black available)
Luminous Flux	3900lm indirect/3900lm direct	3900lm indirect/3900lm direct	3900lm indirect/3900lm direct
CRI (Ra>)	80	80	80
UGR	<19	<19	<19
Dimming type	Resistance dimmer	Resistance dimmer	Resistance dimmer
Working Lifetime(Hour)	>36000	>36000	>36000
Lamp Body Material	Aluminum	Aluminum	Aluminum
Color Temperature	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
Protection Level	IP40	IP40	IP40
Working Temperature	-20°C~40°C	-20°C~40°C	-20°C~40°C
Application	office/conference room/reception	office/conference room/reception	office/conference room/reception
Light Source	SMD2835-Everlight	SMD2835-Everlight	SMD2835-Everlight
Certification	CE/ROHS/FCC	CE/ROHS/FCC	CE/ROHS/FCC
Surface Finished	Powder painting	Powder painting	Powder painting
Feature	Fashion brief	Fashion brief	Fashion brief
Beam angle	Indirect↑112°; Direct↓77°;	Indirect↑112°; Direct↓77°;	Indirect↑112°; Direct↓77°;
warranty	3years	3years	3years
Packaging size	2014*106*91mm Lamp pole 758*362*153mm Lampshade	1090*472*137mm	1360*230*160mm
Outlet length	1.8m	1.8m	1.8m

Floor light

Natash

FS0006

Application

Natash-F

Natash-D

Features

1. Intelligent touch control panel, easily and quickly switch between different light modes;
2. New appearance design, the lamps and lanterns with smooth lines, simple and fashionable overall structure, exquisite workmanship and texture;
3. Adopt high quality optical lens to achieve UGR < 6 , soft lighting and no dazzling, better protect vision, reduce fatigue.
4. Lights come out from both sides, and the color and brightness are dimmable;
5. Desktop type and floor standing are both optional.

Product Details

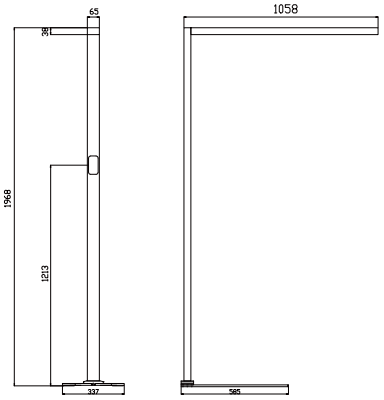

Natash-C

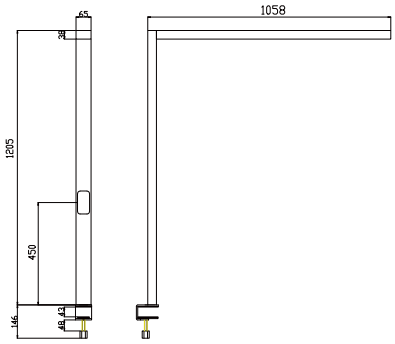

Natash-D

Technical data

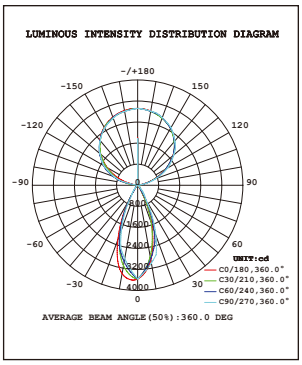

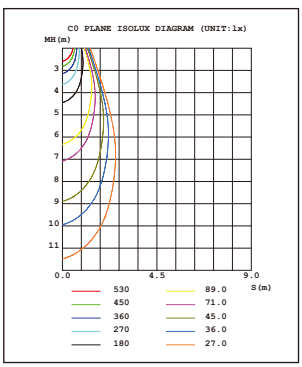

Product Series	Natash-F	Natash-D
Model Number	BR-FS0006-60W-F01	BR-FS0006-60W-F04
Size	1058*65*1968mm	1058*65*1351mm
Input Voltage	AC200-240V	AC200-240V
Lighting effcet	130LM/W	130LM/W
Input Power	60w	60w
Luminous ratio	Indirect↑70%; Direct↓30%;	Indirect↑70%; Direct↓30%;
Power Factor	>0.9	>0.9
Housing Color	RAL7038A(white/black available)	RAL7038A(white/black available)
Luminous Flux	5500 lm indirect/2300lm direct	5500 lm indirect/2300lm direct
CRI (Ra>)	80	80
UGR	<6	<6
Dimming type	1-10V/Daylight sensor/Motion Sensor	1-10V/Daylight sensor/Motion Sensor
Working Lifetime(Hour)	>36000	>36000
Lamp Body Material	Aluminum	Aluminum
Color Temperature	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
Protection Level	IP40	IP40
Working Temperature	-20℃~40℃	-20℃~40℃
Application	office/conference room/reception	office/conference room/reception
Light Source	SMD2835-Everlight / SMD3030-Philips	SMD2835-Everlight / SMD3030-Philips
Certification	CE/ROHS/FCC	CE/ROHS/FCC
Surface Finished	Powder painting	Powder painting
Feature	Fashion brief	Fashion brief
Beam angle	Indirect↑112°; Direct↓45°;	Indirect↑112°; Direct↓45°;
warranty	3years	3years
Packaging size	2023*222*120mm	1360*230*160mm
Outlet length	1.8m	1.8m

Floor light

Siger

FS0010

Application

Siger-F

Siger-D

Features

1. The upper light-emitting ratio is 75%, and the lower light-emitting ratio is 25%. This scientific light-emitting design can achieve the best light effect and lighting experience.
2. It adopts DIY assembly structure, which can be installed by yourself without professionals, and it is very convenient for transportation.
3. Support multiple modes of touch dimming, support light sensing, human body sensing functions;
4. Unique anti-glare design, UGR＜16, uniform and soft light emission, no eye damage;
5.High-quality imported LED chips, super long lifespan , and 3 years warranty.

Product Details

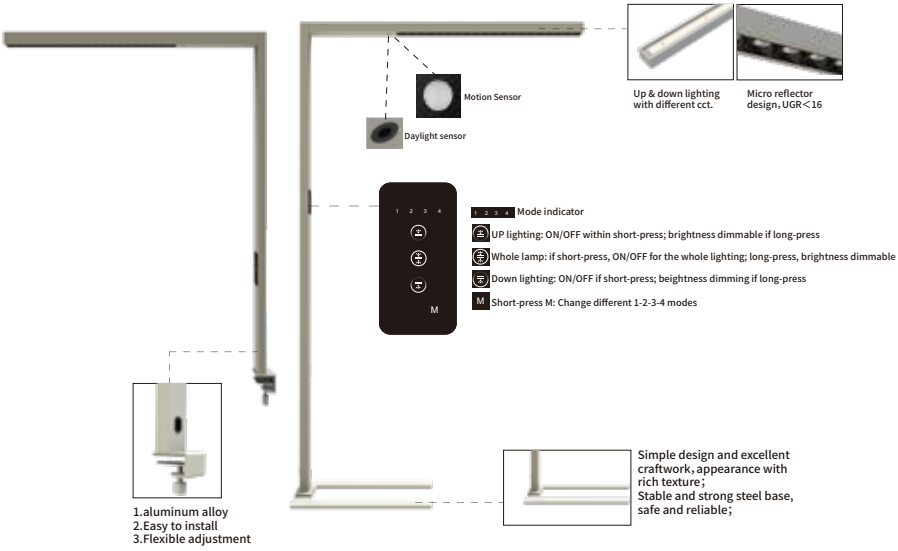

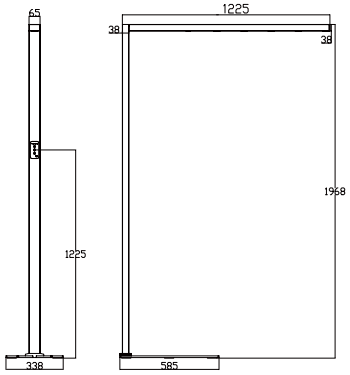

Siger-F

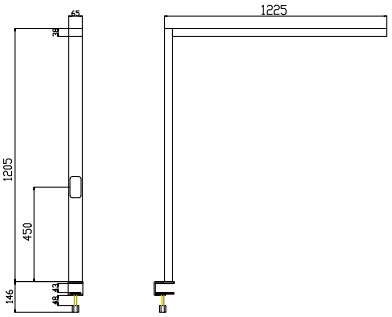

Siger-D

Technical data

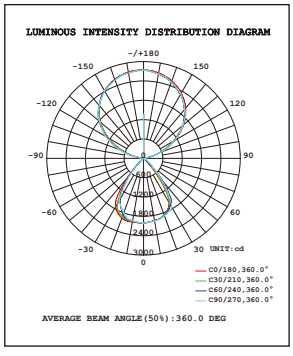

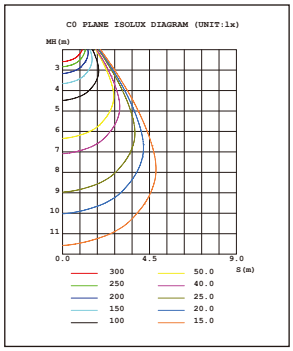

Product Series	Siger-F	Siger-D
Model Number	BR-FS0010-70W-F01	BR-FS0010-70W-F04
Size	1225*65*1968mm	1225*65*1351mm
Input Voltage	AC200-240V	AC200-240V
Lighting effcet	145LM/W	145LM/W
Input Power	70w	70w
Luminous ratio	Indirect↑75%; Direct↓25%;	Indirect↑75%; Direct↓25%;
Power Factor	＞0.9	＞0.9
Housing Color	RAL7038A(white/black available)	RAL7038A(white/black available)
Luminous Flux	7600 lm indirect/2550lm direct	7600 lm indirect/2550lm direct
CRI (Ra>)	80	80
UGR	＜16	＜16
Dimming type	1-10V/Daylight sensor/Motion Sensor	1-10V/Daylight sensor/Motion Sensor
Working Lifetime(Hour)	＞36000	＞36000
Lamp Body Material	Aluminum	Aluminum
Color Temperature	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
Protection Level	IP40	IP40
Working Temperature	-20°C~40°C	-20°C~40°C
Application	office/conference room/reception	office/conference room/reception
Light Source	SMD2835-Everlight / SMD5050-Seoul	SMD2835-Everlight / SMD5050-Seoul
Certification	CE/ROHS/FCC	CE/ROHS/FCC
Surface Finished	Powder painting	Powder painting
Feature	Fashion brief	Fashion brief
Beam angle	Indirect↑112°; Direct↓75°;	Indirect↑112°; Direct↓75°;
warranty	3years	3years
Packaging size	2023*235*120mm	1360*230*160mm
Outlet length	1.8m	1.8m

Floor light

Kapla

FS0011

Application

Kapla-F

Kapla-D

Features

1.Adopt high-quality low-light-decay, low-power, high-efficiency LED chips, energy-saving and environmental protection, significant energy saving, and long lifespan;
2.The platform lamp emits uniformly without ghosting, providing bright and comfortable lighting conditions for reading, studying, office, etc.;
3.The lamp has a large luminous angle and a wide range of illumination, which can be used for two or more desks at the same time;
4.The lamp cap of this floor lamp is detachable and can be used interchangeably with other styles of floor lamps.

Product Details

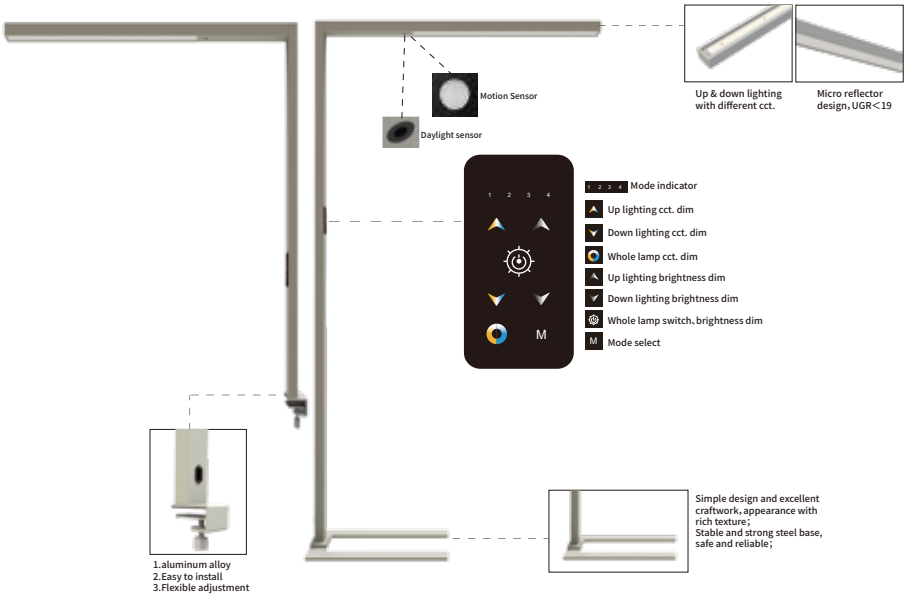

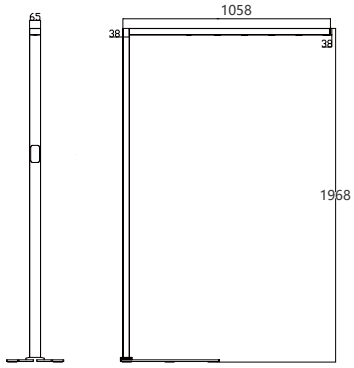

Kapla-F

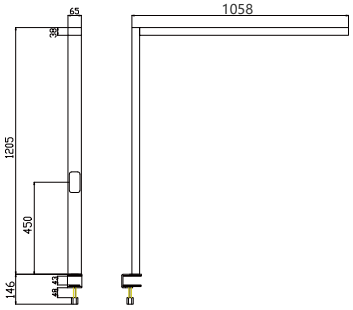

Kapla-D

Technical data





Product Series	Kapla-F	Kapla-D
Model Number	BR-FS0011-60W-I01	BR-FS0011-60W-I04
Size	1058*65*1968mm	1058*65*1351mm
Input Voltage	AC200-240V	AC200-240V
Lighting effcet	130LM/W	130LM/W
Input Power	60w	60w
Luminous ratio	Indirect↑55%; Direct↓45%;	Indirect↑55%; Direct↓45%;
Power Factor	＞0.9	＞0.9
Housing Color	RAL7038A(white/black available)	RAL7038A(white/black available)
Luminous Flux	4300 lm indirect/3500lm direct	4300 lm indirect/3500lm direct
CRI (Ra>)	80	80
UGR	＜19	＜19
Dimming type	1-10V/Daylight sensor/Motion Sensor	1-10V/Daylight sensor/Motion Sensor
Working Lifetime(Hour)	＞36000	＞36000
Lamp Body Material	Aluminum	Aluminum
Color Temperature	3000K~6000K	3000K~6000K
Protection Level	IP40	IP40
Working Temperature	-20℃~40℃	-20℃~40℃
Application	office/conference room/reception	office/conference room/reception
Light Source	SMD2835-Everlight	SMD2835-Everlight
Certification	CE/ROHS/FCC	CE/ROHS/FCC
Surface Finished	Powder painting	Powder painting
Feature	Fashion brief	Fashion brief
Beam angle	Indirect↑120°; Direct↓80°;	Indirect↑120°; Direct↓80°;
warranty	3years	3years
Packaging size	2023*222*120mm	1360*230*160mm
Outlet length	1.8m	1.8m

Floor light

Prima

FS0007

Application

Prima-F

Prima-F

Features

1.Upper light adopts a cutable strip lens, the whole lens has no splicing to achieve a compact structure. Easy install, and its light transmittance is more than 90%;
2.Down towards part uses a diamond-shaped optical lens, surface of the grille lens frosted treatement. High light transmittance and good color rendering; UGR is less than 16, and the light transmittance reaches more than 88%, which is comfortable and protect your eyes;
3.The base is spliced base combined with 2 parts which can save a lot packaging space and freight costs meanwhile.
4. Standard option offers 110W and 140W is also customizable, Lumen in total can reach 10.000lm+, best option for high lumen requirements.

Product Details

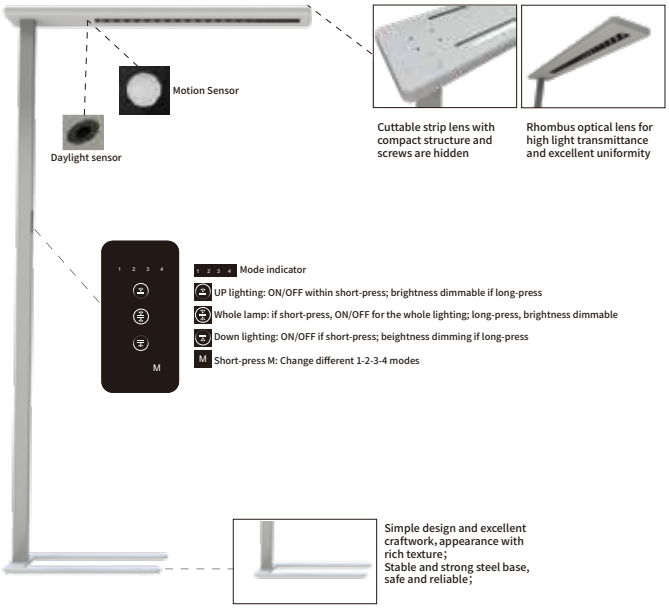

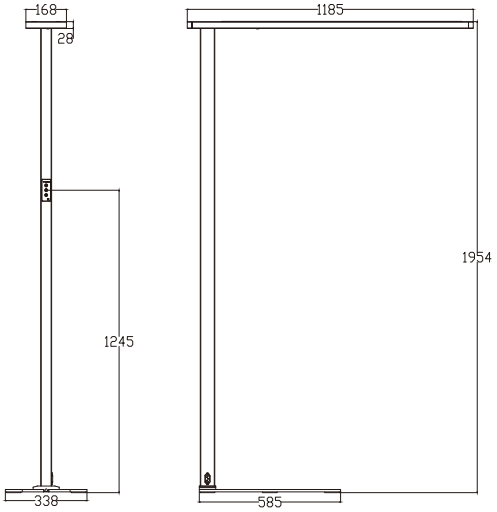

Prima-F

Technical data

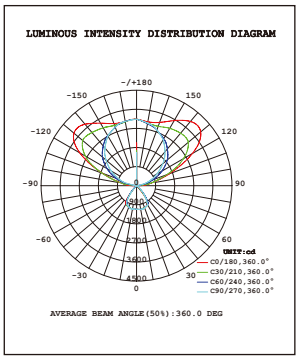

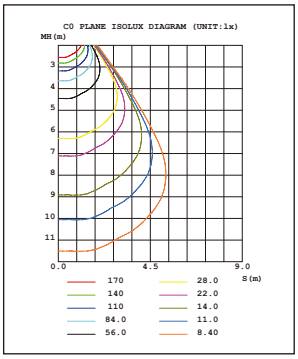

Product Series	Prima-F	Prima-F
Model Number	BR-FS0007-110W-F01	BR-FS0007-140W-F04
Size	1185*168*1954mm	1058*65*1351mm
Input Voltage	AC200-240V	AC200-240V
Lighting effcet	120LM/W	120LM/W
Input Power	110w	140w
Luminous ratio	Indirect↑87%; Direct↓13%;	Indirect↑63%; Direct↓37%;
Power Factor	＞0.9	＞0.9
Housing Color	RAL7038A(white/black available)	RAL7038A(white/black available)
Luminous Flux	5500 lm indirect/2300lm direct	10300 lm indirect/6000lm direct
CRI (Ra>)	80	80
UGR	＜16	＜19
Dimming type	1-10V/Daylight sensor/Motion Sensor	1-10V/Daylight sensor/Motion Sensor
Working Lifetime(Hour)	＞36000	＞36000
Lamp Body Material	Aluminum	Aluminum
Color Temperature	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
Protection Level	IP40	IP40
Working Temperature	-20°C~40°C	-20°C~40°C
Application	office/conference room/reception	office/conference room/reception
Light Source	SMD2835-Everlight / SMD3030-Philips	SMD2835-Everlight /SMD5050-Seoul
Certification	CE/ROHS/FCC	CE/ROHS/FCC
Surface Finished	Powder painting	Powder painting
Feature	Fashion brief	Fashion brief
Beam angle	Indirect↑125°; Direct↓75°;	Indirect↑125°; Direct↓75°;
warranty	3years	3years
Packaging size	2000*320*115mm	2000*320*115mm
Outlet length	1.8m	1.8m

Floor light

Vatix

FS0008

Application

Vatix-F

Vatix-D

Features

1. The main materials are high-quality aluminum profiles, steel plates and PMMA reflector, with stable performance and good heat dissipation design;
2. Daylight sensor and motion sensor supported, smart control dimming, easy use, energy saving and environmental protection;
3. Uptowards and downtowards lighting at the same time, the luminous efficiency reaches 100LM/W, CRI>80, UGR<19, uniform and soft light without glare;
4. The high-sensitivity touch panel can easily realize 1-10V linear dimming.

Product Details

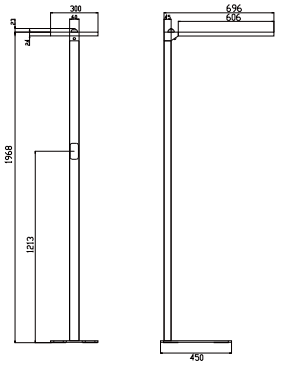

Vatix-F



Vatix-D

Technical data

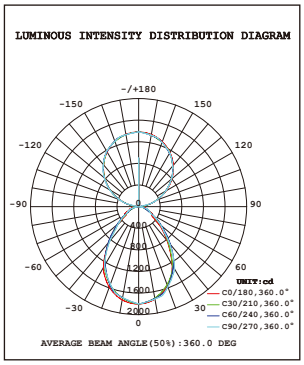

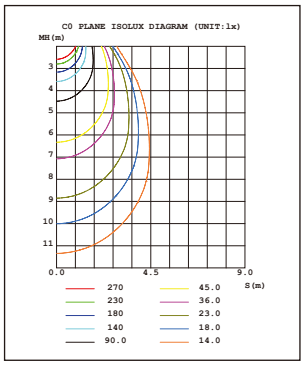

Product Series	Vatix-F	Vatix-D
Model Number	BR-FS0008-70W-F01	BR-FS0008-70W-F04
Size	696*300*1968mm	696*300*1351mm
Input Voltage	AC200-240V	AC200-240V
Lighting effcet	100LM/W	100LM/W
Input Power	70w	70w
Luminous ratio	Indirect↑50%； Direct↓50%;	Indirect↑50%； Direct↓50%;
Power Factor	＞0.9	＞0.9
Housing Color	RAL7038A(white/black available)	RAL7038A(white/black available)
Luminous Flux	3500lm indirect/3500lm direct	3500lm indirect/3500lm direct
CRI (Ra>)	80	80
UGR	＜19	＜19
Dimming type	1-10V/Daylight sensor/Motion Sensor	1-10V/Daylight sensor/Motion Sensor
Working Lifetime(Hour)	＞36000	＞36000
Lamp Body Material	Aluminum	Aluminum
Color Temperature	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
Protection Level	IP40	IP40
Working Temperature	-20°C~40°C	-20°C~40°C
Application	office/conference room/reception	office/conference room/reception
Light Source	SMD2835-Everlight	SMD2835-Everlight
Certification	CE/ROHS/FCC	CE/ROHS/FCC
Surface Finished	Powder painting	Powder painting
Feature	Fashion brief	Fashion brief
Beam angle	Indirect↑112°； Direct↓77°;	Indirect↑112°； Direct↓77°;
warranty	3years	3years
Packaging size	2014*106*91mm Lamp pole /758*362*153mm Lampshade	1360*450*160mm
Outlet length	1.8m	1.8m

Floor light

Tanko

FS0009

Application

Tanko-F

Tanko-D

Features

1. Touch control panel, 4 optional working modes with different functions to meet various use environments' requests such as office, reading room, indoor lighting, etc.;
2. Transparent light guide plate, beautiful and thin, large luminous flux, high luminous efficiency;
3. Stable and reliable standing design. When hit by children or pets, the solid base of the floor light can effectively improve safety.
4. The appearance adopts superb electrostatic powder spraying technology, and we provide a variety of colors' options.

Product Details

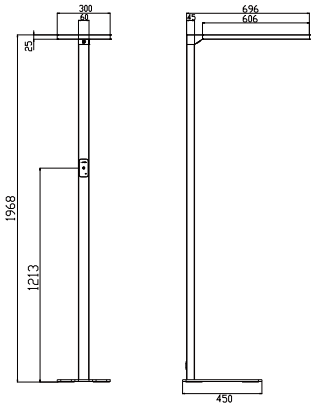

Tanko-F

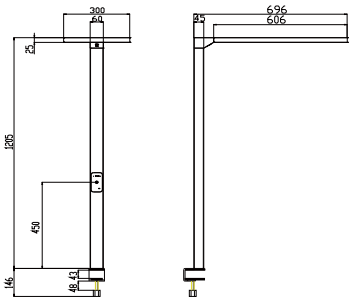

Tanko-D

Technical data

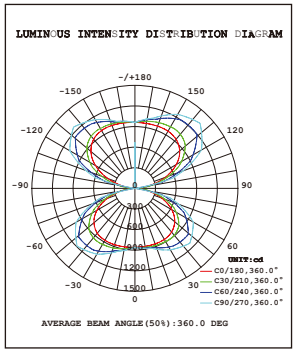

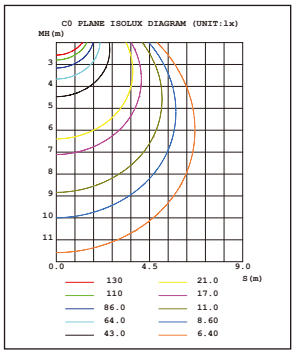

Product Series	Tanko-F	Tanko-D
Model Number	BR-FS0009-70W-F01	BR-FS0009-70W-F04
Size	696*300*1968mm	696*300*1351mm
Input Voltage	AC200-240V	AC200-240V
Lighting effcet	100LM/W&120LM/W	100LM/W&120LM/W
Input Power	70w	70w
Luminous ratio	Indirect↑50%; Direct↓50%;	Indirect↑50%; Direct↓50%;
Power Factor	＞0.9	＞0.9
Housing Color	RAL7038A(white/black available)	RAL7038A(white/black available)
Luminous Flux	7000lm/8400lm	7000lm/8400lm
CRI (Ra>)	80	80
UGR	＜22	＜22
Dimming type	1-10V/Daylight sensor/Motion Sensor	1-10V/Daylight sensor/Motion Sensor
Working Lifetime(Hour)	＞36000	＞36000
Lamp Body Material	Aluminum	Aluminum
Color Temperature	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
Protection Level	IP40	IP40
Working Temperature	-20℃~40℃	-20℃~40℃
Application	office/conference room/reception	office/conference room/reception
Light Source	SMD2835-Everlight	SMD2835-Everlight / SMD3030-Philips
Certification	CE/ROHS/FCC	CE/ROHS/FCC
Surface Finished	Powder painting	Powder painting
Feature	Fashion brief	Fashion brief
Beam angle	Indirect↑120°; Direct↓120°;	Indirect↑120°; Direct↓120°;
warranty	3years	3years
Packaging size	2014*106*91mm Lamp pole /758*362*153mm Lampshade	1360*450*160mm
Outlet length	1.8m	1.8m

Linear Pendant light

CL1226

Lina-A

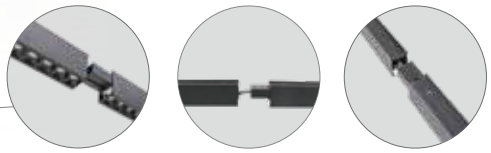

unique screwless linkable design

Features

1.Anti-glare design, UGR<6 through precision PC reflector and PMMA;
2.Efficiency: Up to 115lm/w;
3.High performance SMD2835 LED, CRI>80 CRI>90;
4.CCT: 3000K , 4000K , 5000K, 6000K;
5.Life time: 50000 hours with a lumen maintenance of 20%(LM80);
6.Extruded aluminum,powder coated.
7.UGR < 14

Product Details

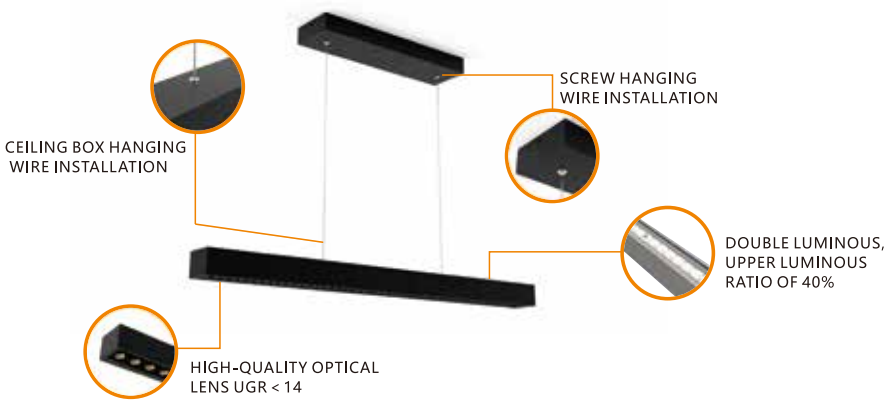

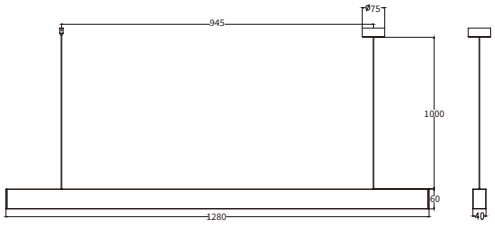

Technical data

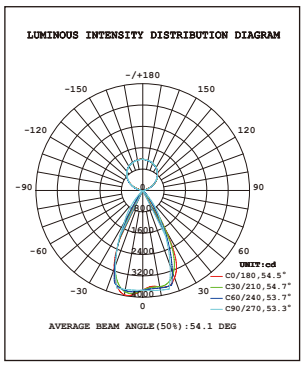

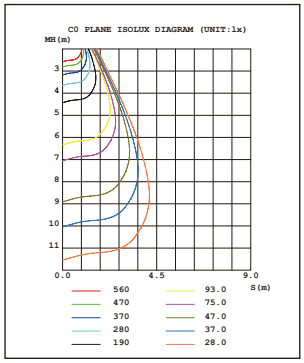

Product Series	Lina-A	Lina-A	Lina-A
Model Number	BR-CL1226-54W-A09	BR-CL0926-40W-A09	BR-CL0626-28W-A09
Size	1280*40*60mm	960*40*60mm	645*40*60mm
Input Voltage	AC200-240V	AC200-240V	AC200-240V
Lighting effcet	130LM/W	130LM/W	130LM/W
Input Power	54W	40W	28W
Luminous ratio	Indirect↑58%; Direct↓42%;	Indirect↑58%; Direct↓42%;	Indirect↑58%; Direct↓42%;
Power Factor	＞0.9	＞0.9	＞0.9
Housing Color	RAL7038A(white/black available)	RAL7038A(white/black available)	RAL7038A(white/black available)
Luminous Flux	4300 indirect↑/3100lm direct↓	3000 indirect↑/2200lm direct↓	2100 indirect↑/1500lm direct↓
CRI (Ra>)	80	80	80
UGR	＜14	＜14	＜14
Dimming type	/	/	/
Working Lifetime(Hour)	＞36000	＞36000	＞36000
Lamp Body Material	Aluminum	Aluminum	Aluminum
Color Temperature	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
Protection Level	IP40	IP40	IP40
Working Temperature	-20°C~40°C	-20°C~40°C	-20°C~40°C
Application	office/conference room/reception	office/conference room/reception	office/conference room/reception
Light Source	SMD2835-Everlight / SMD3030-Philips	SMD2835-Everlight / SMD3030-Philips	SMD2835-Everlight / SMD3030-Philips
Certification	CE/ROHS/FCC	CE/ROHS/FCC	CE/ROHS/FCC
Surface Finished	Powder painting	Powder painting	Powder painting
Feature	Fashion brief	Fashion brief	Fashion brief
Beam angle	Indirect↑112°; Direct↓50°;	Indirect↑112°; Direct↓50°;	Indirect↑112°; Direct↓50°;
warranty	3years	3years	3years
Packaging size	1435*325*195mm	1120*325*195mm	820*325*195mm
Outlet length	1.2m	1.2m	1.2m

Linear Pendant light

CL1226

Lina-B

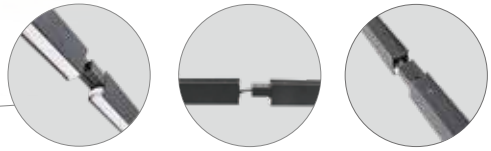

unique screwless linkable design

Features

1.Strong Aluminum end caps, no screws visible;
2.Anti-glare with PMMA microprism lens for eye-protecting;
3.UGR <22
4.Optimized profile structure, easier for seamless connection, saves 80% time on installation.
5. High efficacy, High CRI, Smooth dimmable performance;
6. Widely using both on household lighting and commercial building lighting.Such as office, super market, work shop, school, hospital, bank,warehouse etc.

Product Details

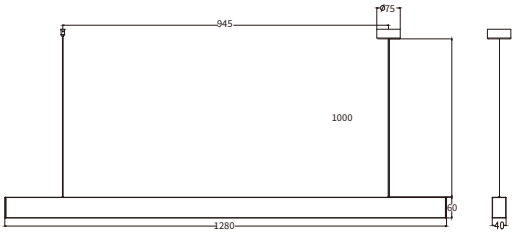

Technical data

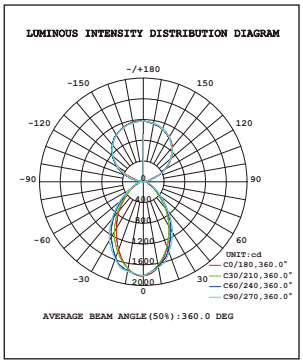

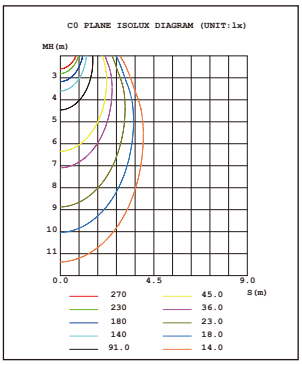

Product Series	Lina-B	Lina-B	Lina-B
Model Number	BR-CL1226-54W-A07	BR-CL0926-40W-A07	BR-CL0626-28W-A07
Size	1280*40*60mm	960*40*60mm	645*40*60mm
Input Voltage	AC200-240V	AC200-240V	AC200-240V
Lighting effcet	130LM/W	130LM/W	130LM/W
Input Power	54W	40W	28W
Luminous ratio	Indirect↑46%; Direct↓54%;	Indirect↑46%; Direct↓54%;	Indirect↑46%; Direct↓54%;
Power Factor	＞0.9	＞0.9	＞0.9
Housing Color	RAL7038A(white/black available)	RAL7038A(white/black available)	RAL7038A(white/black available)
Luminous Flux	3350 indirect↑/4050lm direct↓	2400 indirect↑/2800lm direct↓	1650 indirect↑/2000lm direct↓
CRI (Ra>)	80	80	80
UGR	＜22	＜22	＜22
Dimming type	/	/	/
Working Lifetime(Hour)	＞36000	＞36000	＞36000
Lamp Body Material	Aluminum	Aluminum	Aluminum
Color Temperature	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
Protection Level	IP40	IP40	IP40
Working Temperature	-20°C~40°C	-20°C~40°C	-20°C~40°C
Application	office/conference room/reception	office/conference room/reception	office/conference room/reception
Light Source	SMD2835-Everlight	SMD2835-Everlight	SMD2835-Everlight
Certification	CE/ROHS/FCC	CE/ROHS/FCC	CE/ROHS/FCC
Surface Finished	Powder painting	Powder painting	Powder painting
Feature	Fashion brief	Fashion brief	Fashion brief
Beam angle	Indirect↑112°; Direct↓90°;	Indirect↑112°; Direct↓90°;	Indirect↑112°; Direct↓90°;
warranty	3years	3years	3years
Packaging size	1435*325*195mm	1120*325*195mm	820*325*195mm
Outlet length	1.2m	1.2m	1.2m

Linear Pendant light

CL1226

Lina-C

unique screwless linkable design

Features

1.New technology with high lumen output;
2.Excellent replacement of fluorescent tubes;
3.Glare-free and natural looking light;
4.Works well with a variety of ceiling heights;
5.Linear lights offer better esthetic appeal ;
6.Suspended fixtures are easy to install and maintain;
7.Easy installation;
8. High efficacy, High CRI, Smooth dimmable performance;

Product Details

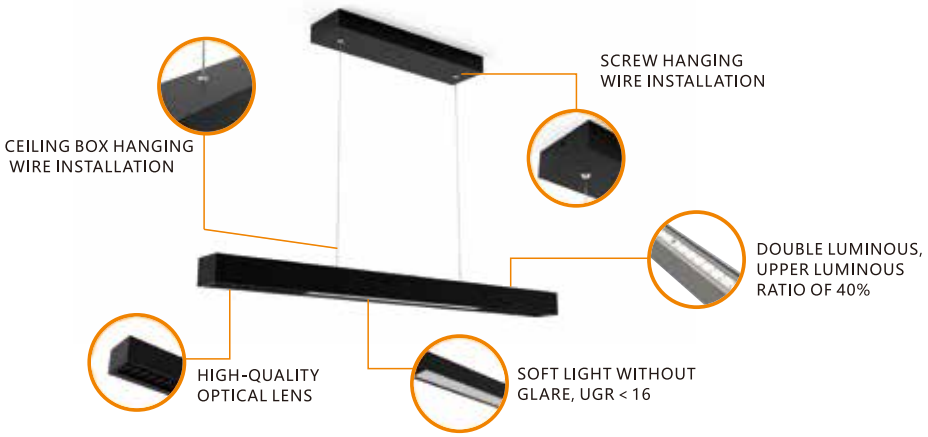

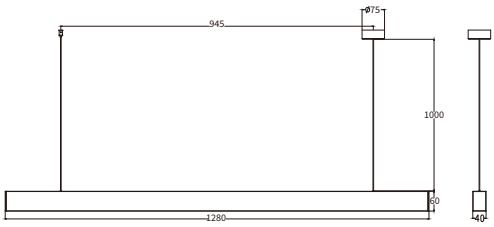

Technical data

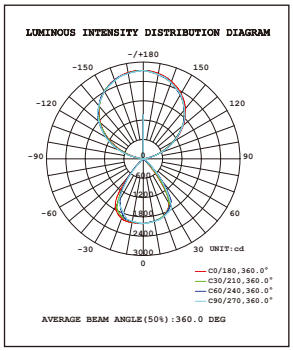

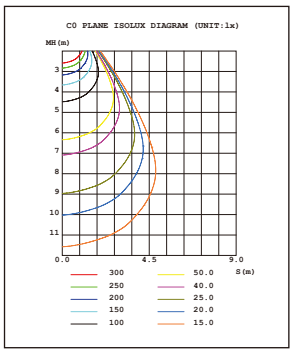

Product Series	Lina-C	Lina-C	Lina-C
Model Number	BR-CL1226-54W-A10	BR-CL0926-40W-A10	BR-CL0626-28W-A10
Size	1280*40*60mm	960*40*60mm	645*40*60mm
Input Voltage	AC200-240V	AC200-240V	AC200-240V
Lighting effcet	130LM/W	130LM/W	130LM/W
Input Power	54W	40W	28W
Luminous ratio	Indirect↑60%; Direct↓40%;	Indirect↑60%; Direct↓40%;	Indirect↑60%; Direct↓40%;
Power Factor	＞0.9	＞0.9	＞0.9
Housing Color	RAL7038A(white/black available)	RAL7038A(white/black available)	RAL7038A(white/black available)
Luminous Flux	4400 indirect↑/3000lm direct↓	3150 indirect↑/2050lm direct↓	2200 indirect↑/1450lm direct↓
CRI (Ra>)	80	80	80
UGR	＜16	＜16	＜16
Dimming type	/	/	/
Working Lifetime(Hour)	＞36000	＞36000	＞36000
Lamp Body Material	Aluminum	Aluminum	Aluminum
Color Temperature	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
Protection Level	IP40	IP40	IP40
Working Temperature	-20°C~40°C	-20°C~40°C	-20°C~40°C
Application	office/conference room/reception	office/conference room/reception	office/conference room/reception
Light Source	SMD2835-Everlight / SMD3030-Philips	SMD2835-Everlight / SMD3030-Philips	SMD2835-Everlight / SMD3030-Philips
Certification	CE/ROHS/FCC	CE/ROHS/FCC	CE/ROHS/FCC
Surface Finished	Powder painting	Powder painting	Powder painting
Feature	Fashion brief	Fashion brief	Fashion brief
Beam angle	Indirect↑112°; Direct↓55°;	Indirect↑112°; Direct↓55°;	Indirect↑112°; Direct↓55°;
warranty	3years	3years	3years
Packaging size	1435*325*195mm	1120*325*195mm	820*325*195mm
Outlet length	1.2m	1.2m	1.2m

Round Pendant light

Omic-C

DD0500

Application

Features

1. Edge lighting LED fixture, ultra slim;
2. Special structure to protect LED failure from LGP inflation or rude transportation;
3. Sorts of brightness or appearance to meet different demands;
4. LM-80 test report LED;
5. Top brand of light guide plate(LGP) Chimei, high transmittance rate;
6. Hydraulic aluminum frame connection, sealed without crack;
7. Multiple installation available for more flexible options;
8. 3-5 years warranty;
9. CE, RoHS, TUV, SAA, FCC certified;
10. High brightness up to 100Lm/W.

Product details

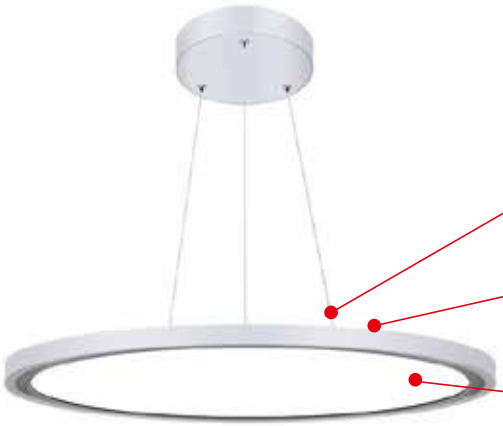

Ceiling tray with high temperature baking varnish process



High-quality aviation aluminum with fine anodizing treatment

Personalized art pattern customization

Technical data





Product Series	Omic-C	Omic-C
Model Number	BR-DD0500-42W	BR-DD0600-48W
Size	D500*25mm	D600*25
Input Voltage	AC200-240V 50/60HZ	AC200-240V 50/60HZ
Lighting effcet	80LM/W&100LM/W	80LM/W&100LM/W
Input Power	42W	48w
Luminous ratio	Indirect↑0%; Direct↓100%;	Indirect↑0%; Direct↓100%;
Power Factor	＞0.9	＞0.9
Housing Color	white	white
Luminous Flux	3360 lm /4200lm	3840lm/4800lm
CRI (Ra>)	80	80
UGR	＜22	＜22
Dimming type	/	/
Working Lifetime(Hour)	＞36000	＞36000
Lamp Body Material	Aluminum	Aluminum
Color Temperature	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
Protection Level	IP40	IP40
Working Temperature	0°C~40°C	0°C~40°C
Application	Office/library/art hall/ etc.	Office/library/art hall/ etc.
Light Source	SMD2835-Everlight	SMD2835-Everlight
Certification	CE/LVD/FCC/ROHS	CE/LVD/FCC/ROHS
Surface Finished	Powder painting	Powder painting
Feature	Fashion brief	Fashion brief
Beam angle	112°	112°
warranty	3years	3years
Packaging size	60*29*60cm	72*29*70cm
Outlet length	1m	1m

Round Pendant light

Omic-T

DT0500

Application

Features

1.Whole lamp adopts tight welding technology, strict sealing process can prevent mosquitoes from entering, and longer lifespan.
2.The ceiling box is made by high-temperature baking varnish process, with pure texture, solid and stable without deformation, and long-lasting durability;

3.It can be used for lighting and artistic decoration.
It can be widely used in high-end places such as hotel lobbies, conference halls, bedrooms, etc., to create an atmospheric and high-end lighting environment.
4. Two different installation optional: hanging with wires and surface mount it under the ceiling plate directly.

Product details

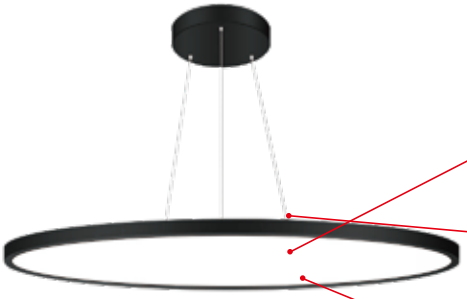

Up and down lighting and a ultra-thin design
Suspension with strong cables

6063 aluminum extrusion with good heat-dissipation

Various customized lighting patterns can be made to create artistic lighting
Diameter 600mm, 800mm, 1000mm,1200mm optional

Technical data





Product Series	Omic-T	Omic-T
Model Number	BR-DT0500-42W	BR-DT0600-48W
Size	D500*25	D500*25
Input Voltage	AC200-240V 50/60HZ	AC200-240V 50/60HZ
Lighting effcet	80LM/W&100LM/W	80LM/W&100LM/W
Input Power	42w	48w
Luminous ratio	Indirect↑50%; Direct↓50%;	Indirect↑50%; Direct↓50%;
Power Factor	＞0.9	＞0.9
Housing Color	white	white
Luminous Flux	3360lm/4200lm	3840lm/4800lm
CRI (Ra>)	80	80
UGR	＜22	＜22
Dimming type	/	/
Working Lifetime(Hour)	＞36000	＞36000
Lamp Body Material	Aluminum	Aluminum
Color Temperature	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
Protection Level	IP40	IP40
Working Temperature	0°C~40°C	0°C~40°C
Application	Office/library/art hall/ etc.	Office/library/art hall/ etc.
Light Source	SMD2835-Everlight	SMD2835-Everlight
Certification	CE/LVD/FCC/ROHS	CE/LVD/FCC/ROHS
Surface Finished	Powder painting	Powder painting
Feature	Fashion brief	Fashion brief
Beam angle	Indirect↑112°; Direct↓112°;	Indirect↑112°; Direct↓112°;
warranty	3years	3years
Packaging size	60*29*60cm	72*29*70cm
Outlet length	1m	1m

Round Pendant light

Omic-X

MD0500

Application

Features

1.Whole lamp adopts tight welding technology, strict sealing process can prevent mosquitoes from entering, and longer lifespan.
2.The ceiling box is made by high-temperature baking varnish process, with pure texture, solid and stable without deformation, and long-lasting durability;

3.It can be used for lighting and artistic decoration. It can be widely used in high-end places such as hotel lobbies, conference halls, bedrooms, etc., to create an atmospheric and high-end lighting environment.
4. Two different installation optional: hanging with wires and surface mount it under the ceiling plate directly.

Installation method

screw mounting

1. Rotate the screw clockwise to the ceiling plate, and insert the male to female plugs to complete the installation.

ceiling mounting

1. Rotate the ceiling plate counterclockwise, fix it on the ceiling with an expansion screw, and then tighten the lamp body clockwise.

cables suspending

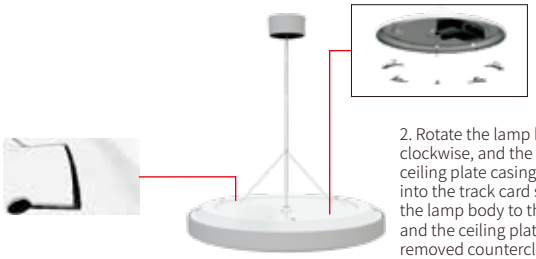

2. Rotate the lamp body casing clockwise, and the screw of the ceiling plate casing is snapped into the track card slot to connect the lamp body to the ceiling plate, and the ceiling plate can be removed counterclockwise.

1. Insert the sling hook from the round hole and slide it into the upper card according to the track.

Technical data





Product Series	Omic-X
Model Number	BR-MD0500-42W
Size	D500*65
Input Voltage	AC200-240V 50/60HZ
Lighting effcet	80LM/W&100LM/W
Input Power	42w
Luminous ratio	Indirect↑0%; Direct↓100%;
Power Factor	＞0.9
Housing Color	white
Luminous Flux	3360lm/4200lm
CRI (Ra>)	80
UGR	＜22
Dimming type	/
Working Lifetime(Hour)	＞36000
Lamp Body Material	Aluminum
Color Temperature	3000K/4000K/5000K/6000K
Protection Level	IP40
Working Temperature	0°C~40°C
Application	Office/library/art hall/etc.
Light Source	SMD2835-Everlight
Certification	CE/LVD/FCC/ROHS
Surface Finished	Powder painting
Feature	Fashion brief
Beam angle	112°
warranty	3years
Packaging size	60*29*60cm
Outlet length	0.6m

AWARD AND APPROVAL

PATENT

实用新型专利证书

实用新型专利证书

实用新型专利证书

外观设计专利证书

外观设计专利证书

外观设计专利证书

外观设计专利证书

外观设计专利证书

外观设计专利证书

Billionaire Lighting Co., LTD

Tel: +86-755-21011239 / 21012009 Fax: +86-755-61110762
Web: www.billionaireled.com E-mail:sales@billionaireled.com
ADD:Building A, Huayi Liwei Industrial Park,Guanlan Town, Longhua District, Shenzhen,China